

Part No. WFIL-H2500-12750F

2500-12750MHz Highpass Filter/SMA



Features:


- Low VSWR
- Low Insertion Loss
- High Performance



Electrical Specification	
Pass Band	2500-12750 MHz
Description	Highpass Filter
Insertion Loss	1.5dB max
V.S.W.R	2.0:1 max
Attenuation	DC-1650 MHz : -45dB min
Power Handling	5W CW
Impedance	50 Ohm
Connector Type	SMA

Environmental Specification	
Operating Temperature	-10~+60°C

Outline Drawing

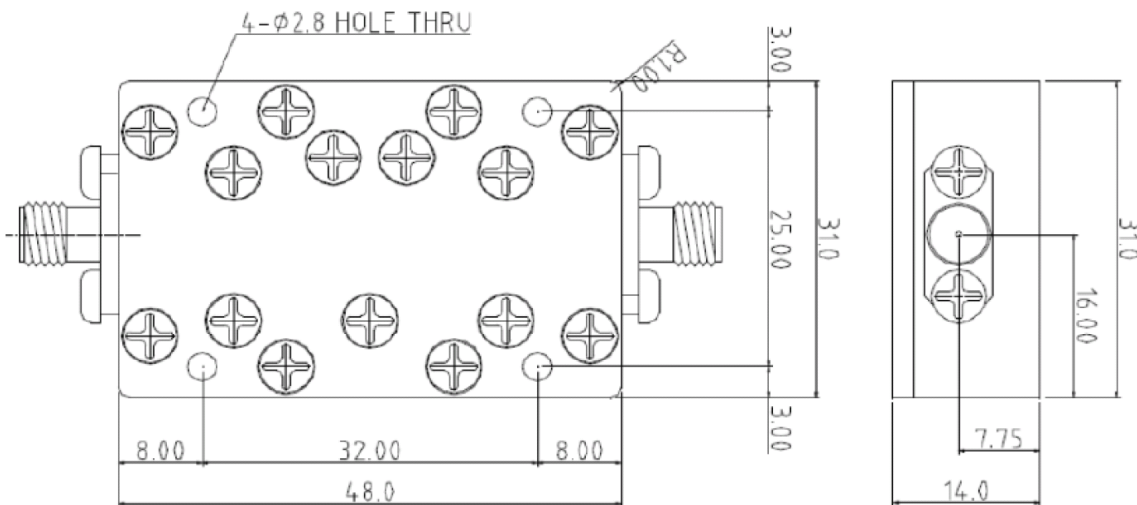

Test Report

