

Part No. WFIL-L700F

DC-700MHz Lowpass Filter/SMA



Features:


- Low VSWR
- Low Insertion Loss
- High Performance



Electrical Specification	
Pass Band Frequency	DC-700 MHz
Description	Lowpass Filter
Insertion Loss	1.5dB max
Return Loss	15dB min
Attenuation	850MHz-4GHz : 30dB min
Power Handling	3W
Impedance	50 Ohm
Connector Type	SMA

Environmental Specification	
Operating Temperature	-45~+85°C

Outline Drawing

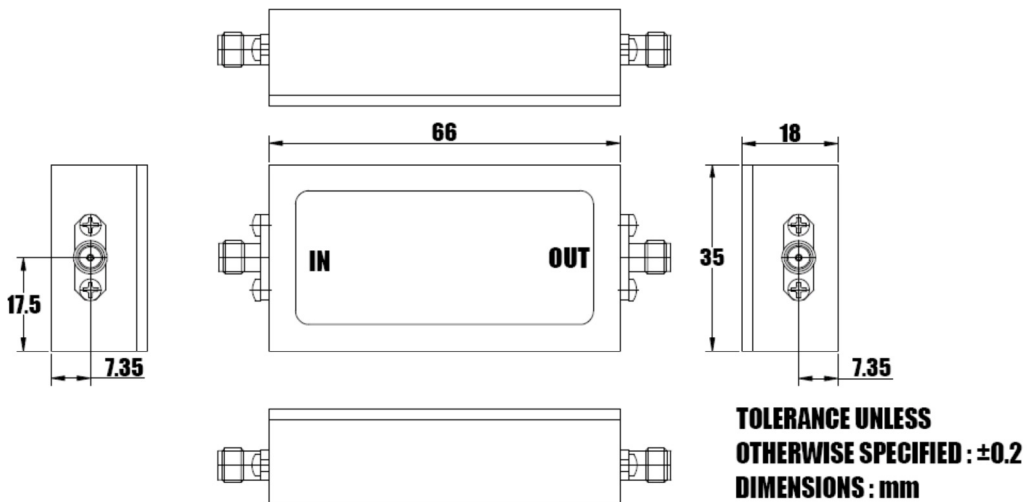

Test Report

