

Part No. WFIL-B1893-1915F

1893-1915MHz Bandpass Filter/N




Features:

- Low VSWR
- Low Insertion Loss
- High Performance




Electrical Specification	
Pass Band	1893-1915 MHz
Description	Bandpass Filter
Insertion Loss	2.0dB max
V.S.W.R	1.25:1 max
Rejection	DC~1805MHz : >100dB 1805~1888MHz : >46dB 1805~1890MHz : >10dB 1920~2005MHz : >46dB 2005~5000MHz : >100dB
Ripple	1.0dB max
Group Delay	150 ns max
Impedance	50 Ohm
Connector Type	N-Female (antenna side), N-Male (CS side)


Outline Drawing

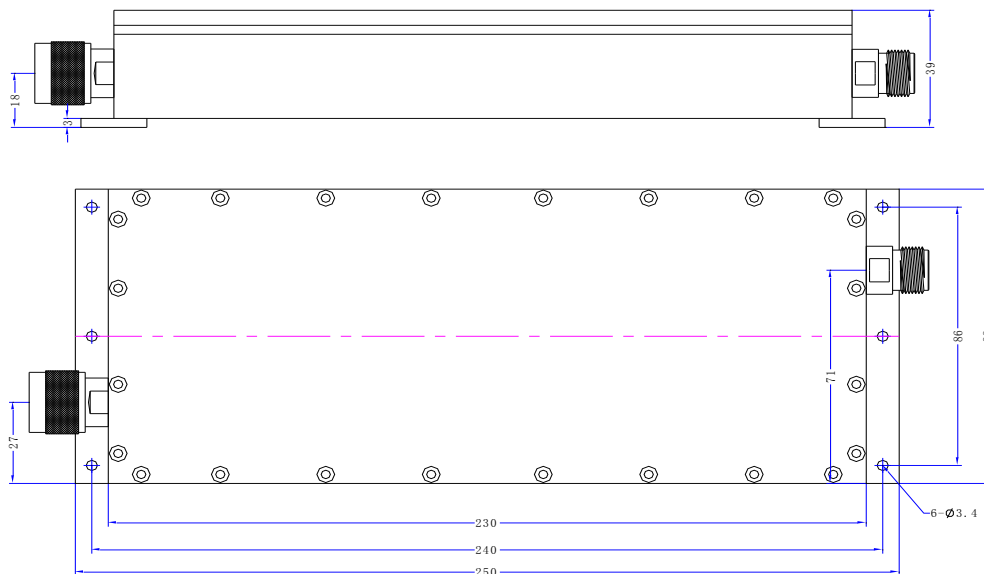

Test Report

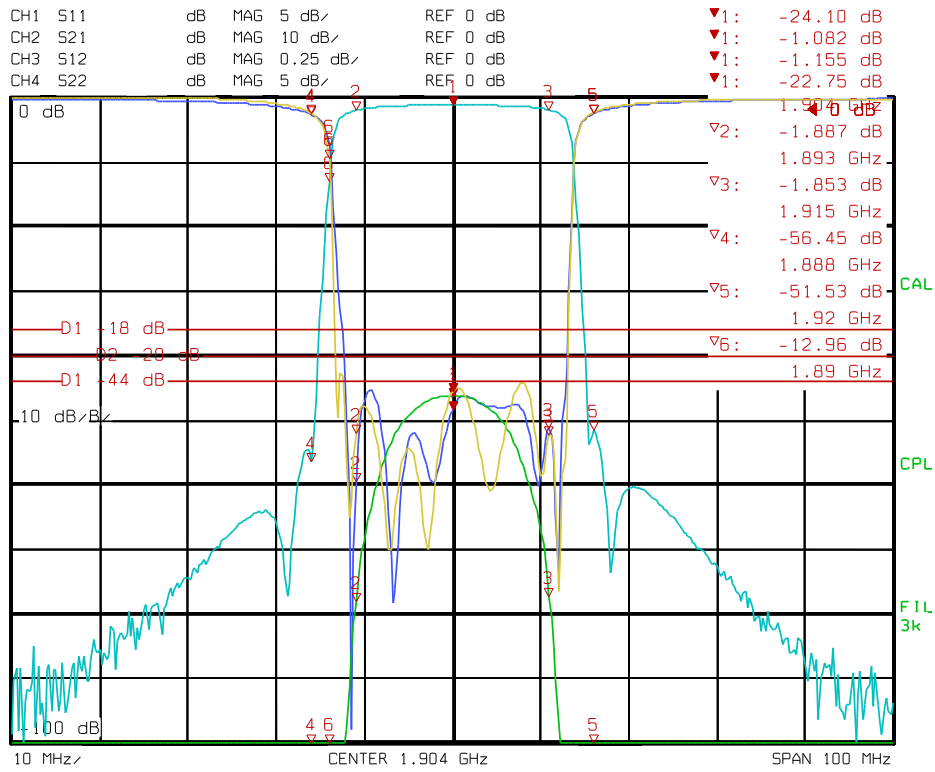

Date: 1.JUN.06 12:23:22

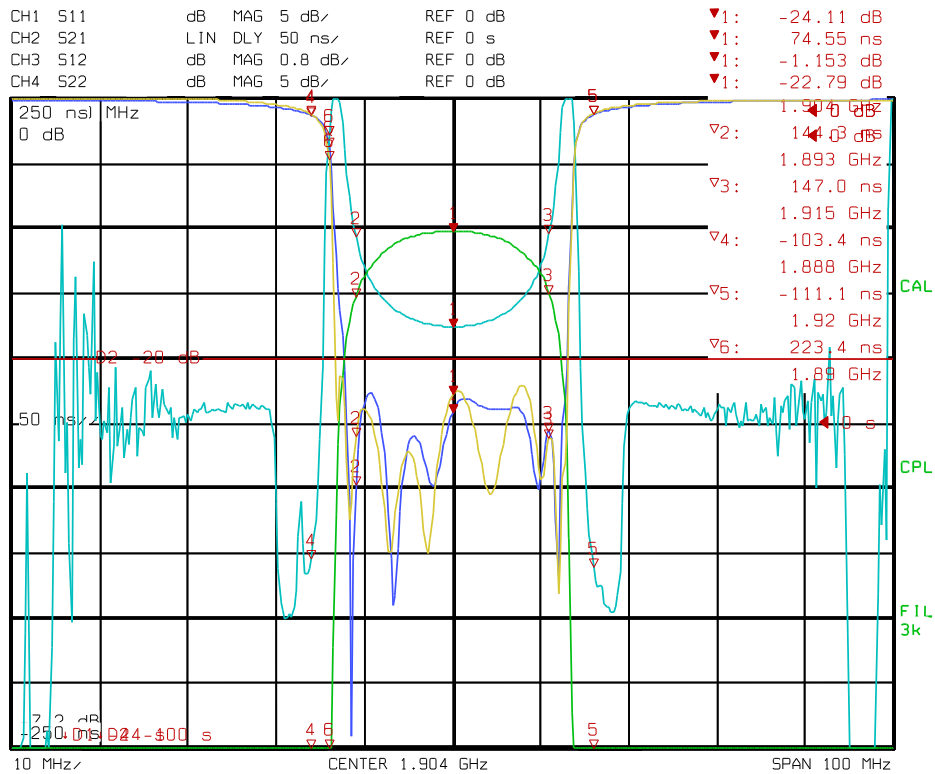

Date: 1.JUN.06 12:22:22